



FIN*floor*[™]
total floor solution





CONTENTS



COVER IMAGE: FINOAK 15/4 190MM CLEAR GRADE WITH A GHOST WHITE CUSTOM OLEUM STAIN AND 2K SEALER TO CLIENTS SPECIFICATIONS

Engineered Wooden flooring	pg 4 - 15
FINOak Pre-finished	pg 6-9
FINOak OLEUM Pre-finished	pg 10-13
FINOak Unfinished	pg 14
Custom Oleum Wood Stains	pg 15
 Vinyl Flooring	 pg 16 - 25
SPC Sapphire	pg 18-19
SPC Diamond Core	pg 20-21
Glue down - Aurora	pg 22-23
Glue down - Galaxy	pg 24-25
 Laminate flooring	 pg 26 - 41
AGT - Bella	pg 28-29
AGT - Natura	pg 30-31
AGT - Effect	pg 32-33
Black Forest	pg 34-35
Authentic Herringbone	pg 36-37
Inovar	pg 38-39
Supreme	pg 40-41
 Underlays, Profiles and Skirting	 pg 42

Icon Key

-  V4 Four sided V-groove
-  SqE Square edge - for a seamless floor with no visible joins
-  BEV Four sided micro bevelled edge
-  Recommended colour matching profiles

Finfloor SA is a member of SAWLFA and the products within this catalogue conform to SAWLFA prescribed standards



NOTE: The images in this catalogue are a representation only and colours may vary from actual product. It is recommended to see actual samples before placing an order.

OAK FLOORING

OAK WOOD FLOORING

A beautiful oak hardwood floor will increase the value of your home and upgrade its looks for generations to come. Oak is the most popular species of hardwood floors because it is an incredibly durable, hard and heavy wood that only gets better with time.


Oak flooring also comes in various natural shades, from limed white to natural to very dark, and can be easily stained to suit whatever room it will furnish. The active grain pattern in oak will hide minor scratches and dents that occur with normal wear, which means fewer repair and maintenance bills.

The flooring is finished with either a smooth surface for a classic polished finish or wire brushed, giving floors a unique aged and distressed look which is on-trend today. FINOak is available in various sizes and thicknesses and comes with a 25-year limited manufacturer's warranty.



PROJECT SHOWCASE
Herringbone and FINOak clear mixed installation. Custom finished with Oleum Bare and 2K sealer to designers specifications - JHB

NOTE: Wood is a natural product, no 2 planks are the same.

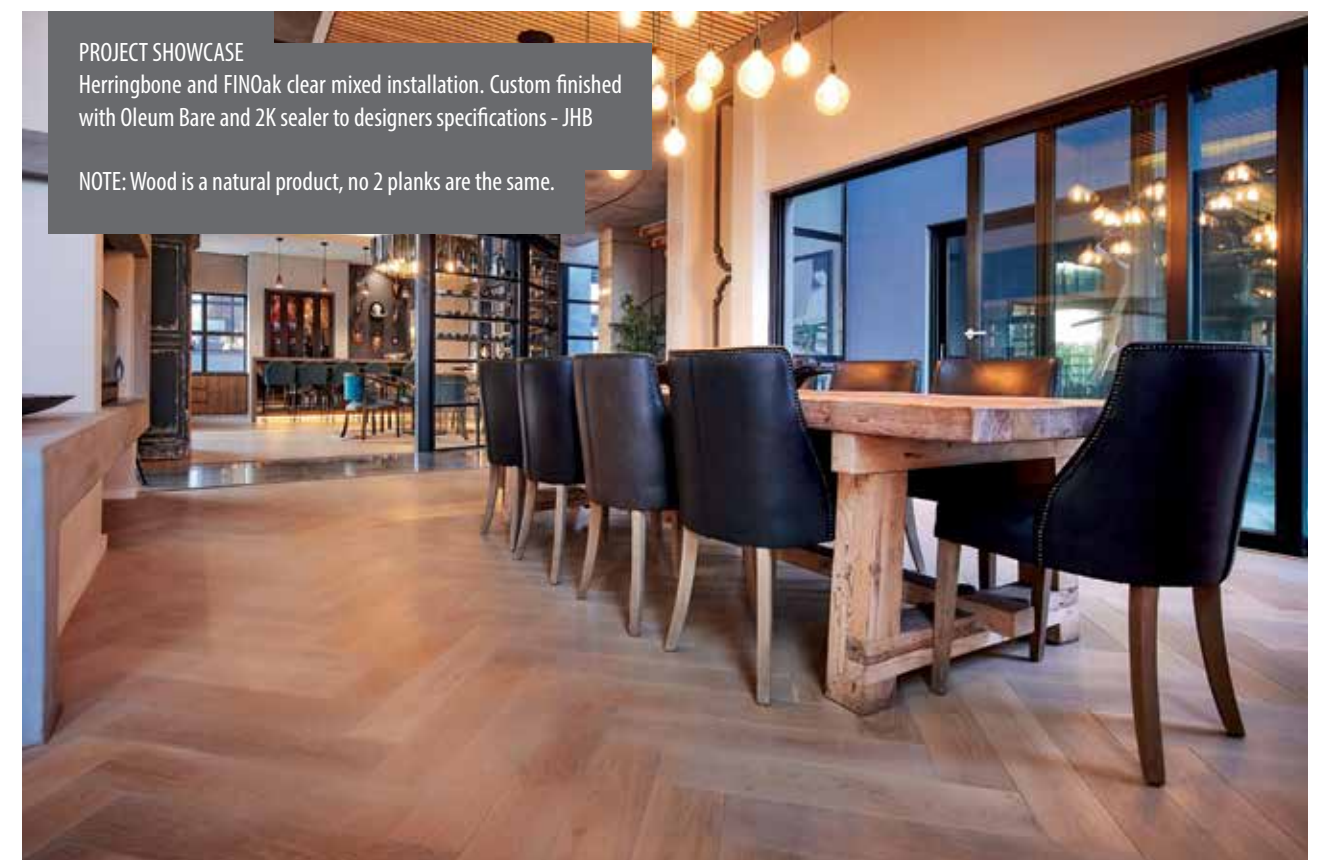



FINOak

Engineered Hardwood Flooring



TSITSIKAMA

14/3MM PRE-FINISHED OAK FLOORING



WINTERBERG

CMP - Custom stain solid oak

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 14/3 X 260 x 1900mm
Packaged: 3.952sqm - 8 pieces / box
Top Face: 3mm lightly brushed Oak top face with LOBA matt lacquer and invisible UV oil

Factory finishing process
3 x primer coat
2 x Invisible oil and UV lamp drying
2 x UV Oil Top Coat
5 x UV lamp drying



Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



TSITSIKAMA

CMP - Custom stain solid Oak

Plank Dimensions: 14/3 x 260 x 1900mm
Packaged: 3.952sqm - 8 pieces / box
Top Face: 3mm lightly brushed smoked Oak top face white oiled and white waxed with American Wood Oil

Factory finishing process
Smoked
1 x White oiled
1 x White wax oiled



This product is dried naturally and the smoked veneer is fumigated in a closed smoke kiln. The colour of the smoke permeates the whole veneer making it more natural, dried naturally over 1-2days.

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



SUGARBUSH

CMP - Custom stain solid Oak

Plank Dimensions: 14/3 x 260 x 1900mm
Packaged: 3.952sqm - 8 pieces / box
Top Face: 3mm lightly brushed dark smoked Oak top face that is white washed and white oiled with American Wood Oil

Factory finishing process
Smoked
1 x Suspension white oiled (Oil-based stained)
1 x White oiled by hand



This product is dried naturally over 1-2 days and the smoked veneer is fumigated in a closed smoke kiln. The colour of the smoke permeates the whole veneer making it more natural.

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty

FINOak

Engineered Hardwood Flooring



OUTENIQUA

15/4MM PRE-FINISHED OAK FLOORING



CEDERBERG

 CMP - Custom stain solid Oak

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 15/4 x 190 x 1900mm
Packaged: 2.888sqm - 8 pieces / box
Top Face: 4mm lightly brushed Oak top face with LOBA Invisible UV lacquered

Finishing process
3 x primer coat
2 x UV sealing coats
9 x UV curing lamps and drying tunnels



Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



MALUTI

 CMP - Custom stain solid Oak

Plank Dimensions: 15/4 x 190 x 1900mm
Packaged: 2.888sqm - 8 pieces / box
Top Face: 4mm lightly brushed and white washed Oak top face with KLUMPP UV lacquer

Finishing process
3 x primer coat
2 x UV sealing coats
9 x UV curing lamps and drying tunnels

KLUMPP

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



OUTENIQUA

 CMP - Custom stain solid Oak

Plank Dimensions: 15/4 x 190 x 1900mm
Packaged: 2.888sqm - 8 pieces / box
Top Face: 4mm lightly brushed and white stained Oak top face with KLUMPP UV lacquer

Finishing process
3 x primer coat
2 x UV sealing coats
9 x UV curing lamps and drying tunnels

KLUMPP

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty

FINOak

Engineered Hardwood Flooring

Oleum
PRE-FINISHED

OLEUM LOCALLY PRE-FINISHED OAK FLOORING



DARK SMOKE - RUSTIC 190

 CMP - Custom stain solid Oak

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 15/4 x 190 x 1900mm
Packaged: 2.888sqm - 8 pieces / box
Top Face: 4mm RUSTIC Oak top face with Oleum Dark Smoke Stain and 2K sealer

Finishing process
Locally finished at the Oleum factory with
1 x Dark Smoke colour coat
2 x 2K sealer that is then dried naturally

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



DARK JAVA - RUSTIC 220

 CMP - Custom stain solid Oak

Plank Dimensions: 15/4 x 220 x 2200mm
Packaged: 2.904sqm - 6 pieces / box
Top Face: 4mm RUSTIC Oak top face with Oleum Dark Java Stain and 2K sealer

Finishing process
Locally finished at the Oleum factory with
1 x Dark Java colour coat
2 x 2K sealer that is then dried naturally

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



EXTRA WHITE - RUSTIC 260

 CMP - Custom stain solid Oak

Plank Dimensions: 15/4 x 260 x 2200mm
Packaged: 3.432sqm - 6 pieces / box
Top Face: 4mm RUSTIC Oak top face with Oleum Dark Jax Stain and 2K sealer

Local finishing process
Locally finished at the Oleum factory with
1 x Extra White colour coat
2 x 2K sealer that is then dried naturally

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



DARK JAVA

FIN Oak

Engineered Hardwood Flooring

Jax Oleum
PRE-FINISHED

COLOUR CORRECTED TO REPLICATE BARE HDF

OLEUM LOCALLY PRE-FINISHED OAK FLOORING



2K - HERRINGBONE - NATURE GRADE

CMP - Custom stain wood veneer

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 14/3 x 150 x 930 mm
Packaged: 2.79sqm - 20 pieces / box
Top Face: 3mm NATURE GRADE Oak top face with Jax 2K sealer

Finishing process
Locally finished at the Oleum factory with
2 x 2K sealer that is then dried naturally

Recommended Coverage: Unlimited due to a seamless
glue down installation

Warranty: 25 years limited manufacturer's warranty




EXTRA BLACK - CLEAR 190

CMP - Custom stain wood veneer

Plank Dimensions: 15/4 x 190 x 1900mm
Packaged: 2.888sqm - 8 pieces / box
Top Face: 4mm CLEAR Oak top face with Oleum Extra
Black clear stain and 2K sealer

Finishing process
Locally finished at the Oleum factory with
1 x Extra Black clear colour coat
2 x 2K sealer that is then dried naturally

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty

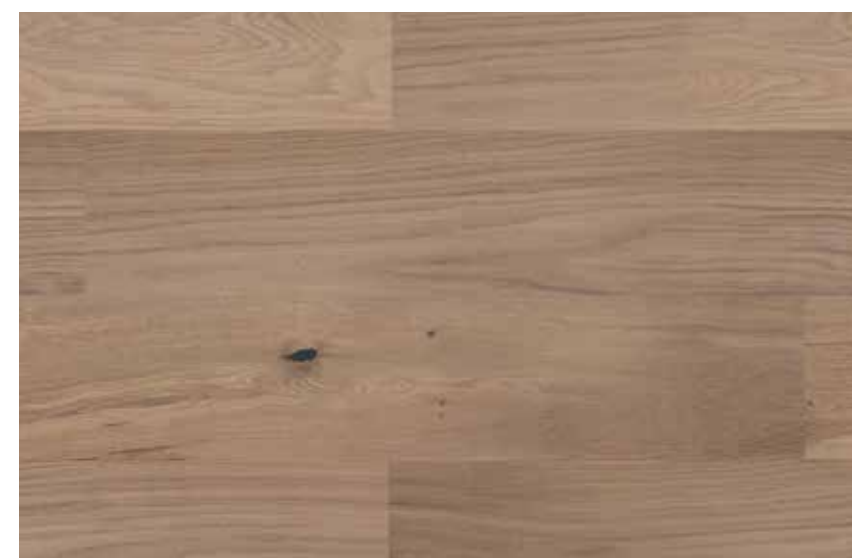

BARE - HDF - RUSTIC

CMP - Custom stain wood veneer

Plank Dimensions: 10/2 x 190 x 1200 mm
Packaged: 2.28 sqm - 10 pieces / box

Plank Dimensions: 10/2 x 190 x 1900 mm
Packaged: 3.61 sqm - 10 pieces / box
Top Face: 2mm lightly brushed Oak top face with Oleum
Bare Stain and 2K sealer

Local finishing process
Locally finished at the Oleum factory with
1 x Bare Oleum colour coat
2 x 2K sealer that is then dried naturally

Recommended Coverage: 12 x 12 lin.m in length / width
Warranty: 25 years limited manufacturer's warranty



JAX OLEUM CUSTOM COLOUR WOOD STAINS - SELECT YOUR PLANK

» **START HERE BY SELECTING YOUR UNFINISHED FINOAK PLANK**
Select a grade, plank size and application method to suit your personal style and budget



FINOAK CLEAR UNFINISHED FINOAK RUSTIC UNFINISHED FINOAK HERRINGBONE UNFINISHED

CLEAR GRADE

Clear grade is selected from the fine grain wood found around the center core of the log where there are no knots. Each tree produces fewer clear grade planks.



RUSTIC GRADE

Rustic grade is manufactured from the outer parts of the core where branches attach and is full of character and visibly more knotty.



NATURE GRADE

Nature grade natural characters have both dark and light variations. The planks have a visible increase in both knots and pin holes.



UNFINISHED OAK - AVAILABLE PLANK SIZES

Product	Plank size Thickness x width x length	Top face	Core	Finish	Grade	Installation
FINOAK 10/2 HDF 1200	10/2 x 190 x 1200mm	2mm Oak	HDF Core	Unfinished, Brushed	Rustic	Fold down click
FINOAK 10/2 HDF 1900	10/2 x 190 x 1900mm	2mm Oak	HDF Core	Unfinished, Brushed	Rustic	Fold down click
FINOAK Herringbone	14/3 x 150 x 930mm	3mm Oak	3-ply	Unfinished, Smooth	Nature	Tongue & groove
FINOAK 190 clear	15/4 x 190 x 1900mm	4mm Oak	3-ply	Unfinished, Smooth	Clear	Waxed fold down click
FINOAK 190 rustic	15/4 x 190 x 1900mm	4mm Oak	3-ply	Unfinished, Smooth	Rustic	Waxed fold down click
FINOAK 220 rustic	15/4 x 220 x 2200mm	4mm Oak	3-ply	Unfinished, Smooth	Rustic	Waxed fold down click
FINOAK 260 rustic	15/4 x 260 x 2200mm	4mm Oak	3-ply	Unfinished, Smooth	Rustic	Waxed fold down click

NOTE! INSTALLATION METHOD

Any of the FINOAK flooring ranges that come with an easy click installation system can be installed as a glue down installation. Thereby increasing the floor coverage allowance and reduce or negate the use of expansion profiles.

JAX OLEUM CUSTOM COLOUR WOOD STAIN - SELECT YOUR COLOUR



STEP 2 - SELECT YOUR CUSTOM COLOUR

Jax Oleum is an incredibly effective and durable single coat, oil based wood stain that protects, nourishes and colours wood in one very easy application.

It can be applied to any type of uncoated wood, used for both interiors or exterior applications and works successfully with other over coat brands.

Proudly made in South Africa, Jax Oleum is a global green tag certified product with low VOC emissions. With over 70 colours to choose from the possibilities are endless. These are some of our favorite trending colours.



NOTE! Although it will increase the final cost, we recommend you use a 2K sealer with any custom colour

VINYL FLOORING

VINYL FLOORING

Vinyl is the most popular form of resilient flooring for busy households, offices, cafés and commercial environments because it is low-maintenance, water-resistant, cost-effective, and long-lasting.

It also has the perfect balance of firmness and "give", offering a slight spring in the step while maintaining a solid and sturdy feel underfoot. Thanks to recent technological advances, today's vinyl comes in a wide range of high-quality, beautiful finishes without losing its enduring appeal.

Vinyl plank flooring is durable with commercial-grade wear-layers that can withstand heavy traffic. Larger commercial spaces can benefit from a glue-down vinyl installation.


Businesses and households alike can appreciate that vinyl is long-lasting and easy to maintain. Regular sweeping and weekly mopping is all you need to keep your floors looking incredible.



PROJECT SHOWCASE

Diamond Core SPC, Matrix Opal installed through out the Road lodge resturant and guest bedrooms.



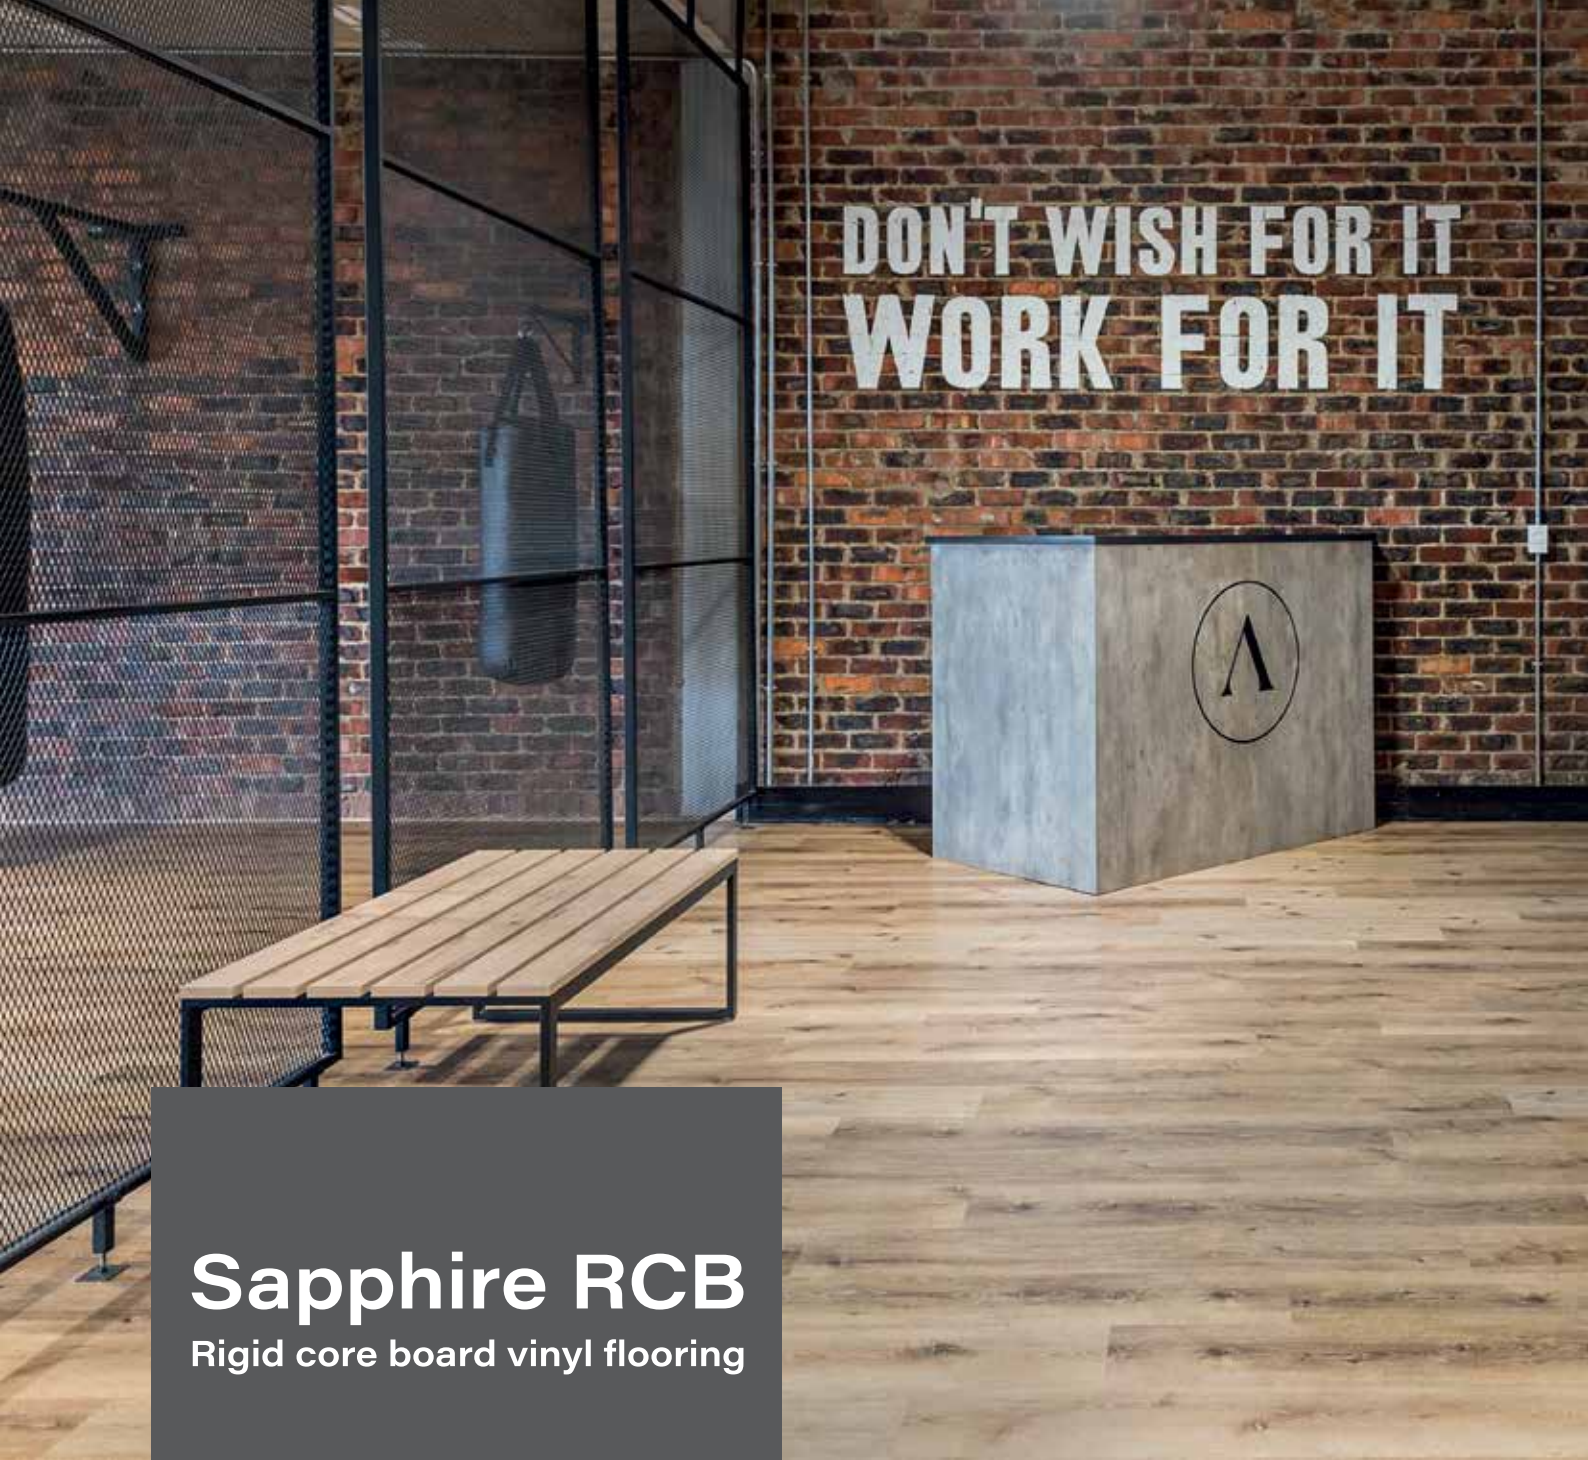

Sapphire RCB

Rigid core board vinyl flooring

CITRINE (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 5.5 x 184 x 1230mm

Packaged: 1.81sqm - 8 pieces / box

Recommended Coverage: 10 X 15 lin.m in length / width

Core: Rigid SPC core, with 1mm IXPE underlayment attached to the back

Wear Layer: 0.3mm Super UV wear layer

Warranty: 20 years heavy domestic / 5 years light commercial grade



Super UV Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	Group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bf1-S1



SAPPHIRE SPC



CITRINE - ANTIQUE WOOD TEXTURE - BEV



CMP - Sand



GARNET - ANTIQUE WOOD TEXTURE - BEV



CMP - Sand



JONQUIL - ANTIQUE WOOD TEXTURE - BEV



CMP - Twilight



MORGANITE - ANTIQUE WOOD TEXTURE - BEV



CMP - Sand



CRYSTAL - ANTIQUE WOOD TEXTURE - BEV



CMP - Storm



PACIFIC OPAL - ANTIQUE WOOD TEXTURE - BEV



CMP - Storm



SMOKEY QUARTZ - ANTIQUE WOOD TEXTURE - BEV



CMP - Smoked Topaz



SMOKED TOPAZ - ANTIQUE WOOD TEXTURE - BEV



CMP - Smoked Topaz

INTERNATIONAL CERTIFICATION





DIAMOND CORE SPC

Stone plastic composite, stable vinyl flooring

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 6.5 x 228 x 1500mm

Packaged: 2.052sqm - 6 pieces / box

Recommended Coverage: 15 X 15 lin.m in length / width

Core: Rigid SPC core, with 1.5mm IXPE underlayment attached to the back

Wear Layer: 0.5mm Super UV wear layer

Warranty: 30 years heavy domestic / 10 years light commercial grade



Super UV Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	Group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bfl-S1



DIAMOND CORE SPC



ALABASTER - ANTIQUE WOOD TEXTURE - BEV



SUNSTONE - ANTIQUE WOOD TEXTURE - BEV



BLUE QUARTZ - ANTIQUE WOOD TEXTURE - BEV



COLORADO TOPAZ - ANTIQUE WOOD TEXTURE - BEV



AGATE - ANTIQUE WOOD TEXTURE - BEV



MATRIX OPAL - ANTIQUE WOOD TEXTURE - BEV




MALACHITE - ANTIQUE WOOD TEXTURE - BEV



BLACK DIAMOND - ANTIQUE WOOD TEXTURE - BEV

INTERNATIONAL CERTIFICATION

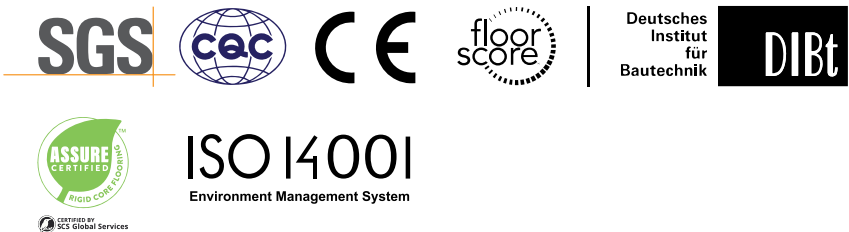



AURORA

Glue down LVT

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 2 x 235 X 1227mm

Packaged: 5.19sqm - 18 pieces / box

Recommened Coverage: Glue down installation - seamless floor application

Core: Extruded virgin Vinyl (LVT) core

Wear Layer: 0.33mm Super UV wear Layer

Warranty: 20 years heavy domestic / 5 years light commercial grade


Technical specifications	EN Norms	Result	ASTM Norms	Result
Wear resistance	EN660-1/2	Group T	ASTM F510 ASTM D3384	Pass
Slip resistance	EN12893	Class DS	ASTM D2047-93	Pass
Toxic element test	EN71-3	Pass	Not toxic and does not contain heavy metals and formaldehyde	
Fire classification	EN13501-1 ENISO9239-1	Bf1-S1	ASTME648-10	Pass



INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification



AURORA GLUE DOWN VINYL



POLARIS - ANTIQUE WOOD TEXTURE - BEV

CMP - Hungarian Ash



MIRA - ANTIQUE WOOD TEXTURE - BEV

CMP - Antarctic



ELECTRA - MICRO BEVEL - ANTIQUE WOOD TEXTURE - BEV

CMP - Santos Latte



TITAN - ANTIQUE WOOD TEXTURE - BEV

CMP - Sand



ARIEL - ANTIQUE WOOD TEXTURE - BEV

CMP - Walnut



CALLISTO - ANTIQUE WOOD TEXTURE - BEV

CMP - New York Grey



GALAXY

Glue down LVT

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 2.5 x 235 x 1227mm
Packaged: 4.33sqm - 15 pieces / box

Recommended Coverage: Glue down installation - seamless floor application
Core: Extruded virgin Vinyl (LVT) core
Wear Layer: 0.55mm Super UV wear Layer
Warranty: 30 years heavy domestic / 10 years general commercial grade




Super UV Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product


Technical specifications	EN Norms	Result	ASTM Norms	Result
Wear resistance	EN660-1/2	Group T	ASTM F510 ASTM D3384	Pass
Slip resistance	EN12893	Class DS	ASTM D2047-93	Pass
Toxic element test	EN71-3	Pass	Not Toxic and Does not contain heavy metals and formaldehyde	
Fire classification	EN13501-1 ENISO9239-1	Bf1-S1	ASTME648-10	Pass

COSMOS (ABOVE)

INTERNATIONAL CERTIFICATION

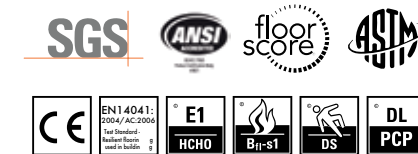

EN ISO 10582 - Fit for use classification



GALAXY GLUE DOWN VINYL



LUNA - ANTIQUE WOOD TEXTURE - BEV

CMP - Meric



BIANCA - ANTIQUE WOOD TEXTURE - BEV

CMP - Twilight



LYRA - ANTIQUE WOOD TEXTURE - BEV

CMP - Sand



COSMOS - ANTIQUE WOOD TEXTURE - BEV

CMP - Sand



ANDROMEDA - ANTIQUE WOOD TEXTURE - BEV

CMP - Vaal



NOVA - ANTIQUE WOOD TEXTURE - BEV

CMP - Smoked Topaz

LAMINATE FLOORING

Laminate flooring is a cost-effective, high-performing and low maintenance option for incorporating the look of hardwood flooring into your home or office.

Made primarily from wood fibre pulp pressed together at high temperatures, it's considerably **more affordable** than natural timber.

Protected by a tough **Aluminium oxide resin coating**, laminate flooring is much stronger and more scratch-resistant, impact-resistant and longer lasting than any hardwood, vinyl, or carpet. Laminate floorboards will survive high traffic, rowdy kids and pet's claws. Laminate's UV resistant quality means the colour of your floors is less likely to fade over time.

Developments in laminate flooring technology mean the difference between natural timber and laminate is much harder to distinguish today. Many laminate floorboards feature **unique embossing to mimic the appearance and texture of natural wood** accurately.

Laminate flooring's moisture and stain resistant surface make **cleaning effortless**; you can easily wipe away spills and marks with a soft microfibre cloth.


Laminate flooring features a **simple locking system which is very easy to install** and can be floated over most existing floors, saving installation time over other types of flooring which may need to be glued, stapled or nailed down.

Laminate flooring is **hypo-allergenic** because it does not have spaces between sections where dust and debris can be trapped. As such, you benefit from the lower risk of allergies related to dust and mites.



PROJECT SHOWCASE

XXL Black forest Maplewood mist laminate flooring fitted throughout a large open plan home. From the kitchen, through to the lounge, dining room and bar this luxury laminate can be installed up to 300 square meters before an expansion profile is required. Ideal for South African large open plan living conditions.

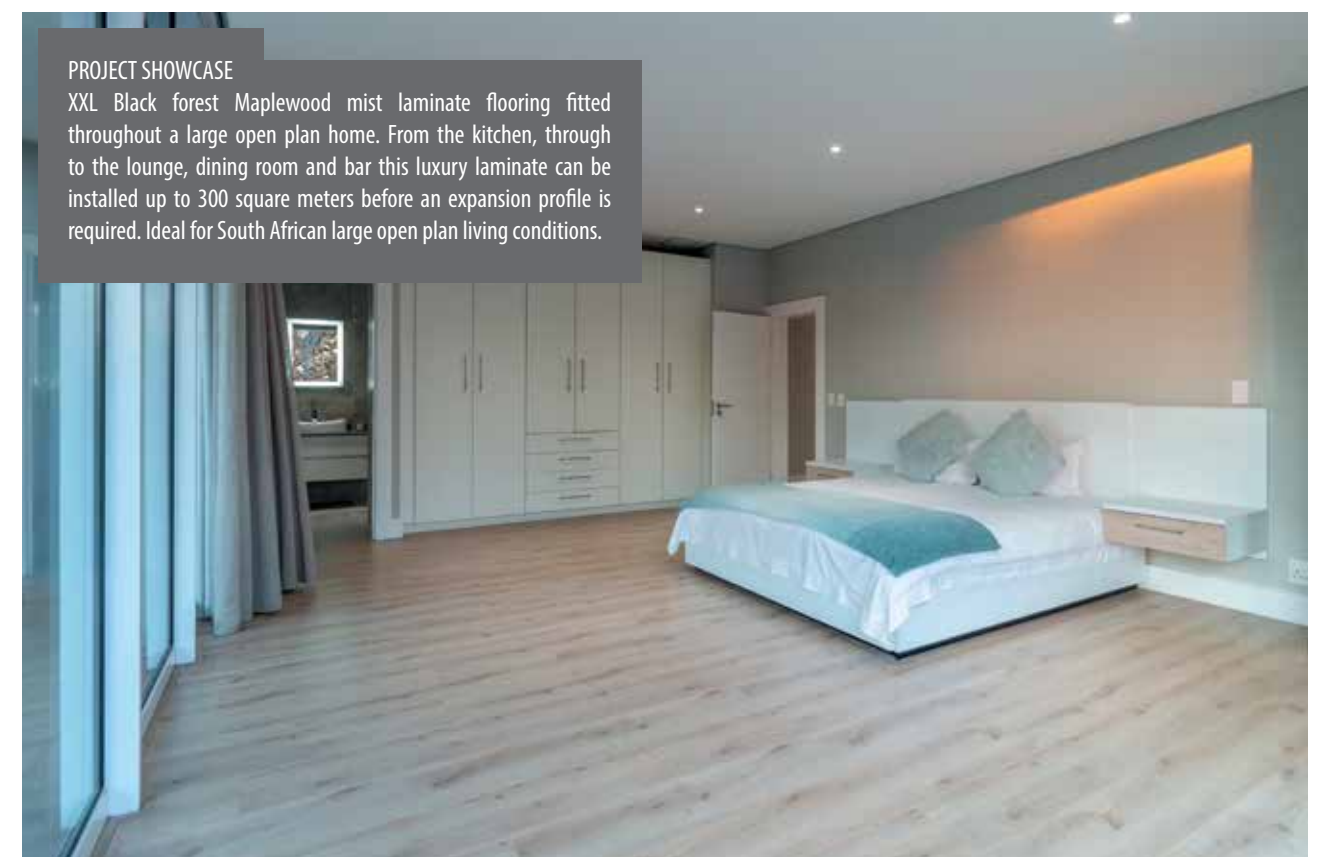



ANEMON (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 193 X 1200 X 8mm
 Packaged: 2.316 sqm - 10 pieces / box

Recommended Coverage: 9 x 9 lin.m in any direction
 Core: 8mm HDF Core with an average board density > 850 kg/m³
 Fit for use grading: AC3/W31 – Moderate commercial / Heavy domestic
 Warranty: 15 years heavy domestic / 5 years moderate commercial use

Timber land finish

BELLA with Timber and wood grain finish that replicates the feel and texture of real wood and a square edge that creates a seamless flooring pattern with no visible plank lines

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC3/W31
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC1



ANEMON - TIMBERLAND FINISH -

CMP - Hungarian Ash



VEGAS - TIMBERLAND FINISH -

CMP - Volga



FREZYA - TIMBERLAND FINISH -

CMP - Antarctic



LILIUM - TIMBERLAND FINISH - - 2 STRIP

CMP - Volga



AKASYA - TIMBERLAND FINISH -

CMP - Yellow Gum



DEFNE - TIMBERLAND FINISH -

CMP - Walnut



TREND (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 191 X 1200 x 8mm
 Packaged: 1.83sqm - 8 pieces / box

Recommended Coverage: 10 x 12 lin.m in length / width
 Core: 8mm HDF. Core with an average board density > 850 kg/m³
 Fit for use grading: AC4/W32 - V4 – General commercial / Heavy domestic
 Warranty: 20 years heavy domestic / 5 years general commercial use

V4

Natura line with a wood embossed texture that replicates the texture of real wood and a 4-sided V groove that creates a highlights the laying a pattern on the floor

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 12%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



NIL - WOOD EMBOSSED -

CMP - Hungarian Ash



VOLGA - WOOD EMBOSSED -

CMP - Volga



TUNA - WOOD EMBOSSED -

CMP - Storm



CANYON - WOOD EMBOSSED -

CMP - Santod Latte



MERIC - WOOD EMBOSSED -

CMP - Santos Latte



ILGAZ - WOOD EMBOSSED -

CMP - Sand



TREND - WOOD EMBOSSED -

CMP - Oakwood Manor



SELGE - WOOD EMBOSSED -

CMP - Smoked Topaz



effect

PAMIR (ABOVE)

3D EIR


V4 Luxury 12mm Effect comes with a DEEP and realistic 3D EIR (Embossed in register) surface and a 4 sided v-groove

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 12 x 189 x 1195mm
Packaged: 1.3351 sqm - 6 pieces / box

Recommended Coverage: 10 x15 lin.m in length / width
Core: 12mm HDF core with an average board density > 850-900 kg/m³
Fit for use grading: AC5/W33 - V4 – Heavy commercial / Heavy domestic
Warranty: 25 years heavy domestic / 5 years heavy commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC5/W33 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 12%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



12MM EFFECT



ALP - EIR - **V4**

 CMP - Volga




EVEREST - EIR - **V4**

 CMP - Volga



TIBET - EIR - **V4**

 CMP - Santos Latte




URAL - EIR - **V4**

 CMP - Sand



ALTAY - EIR - **V4**

 CMP - Harvard Cherry




FUJI - EIR - **V4**

 CMP - Merbau




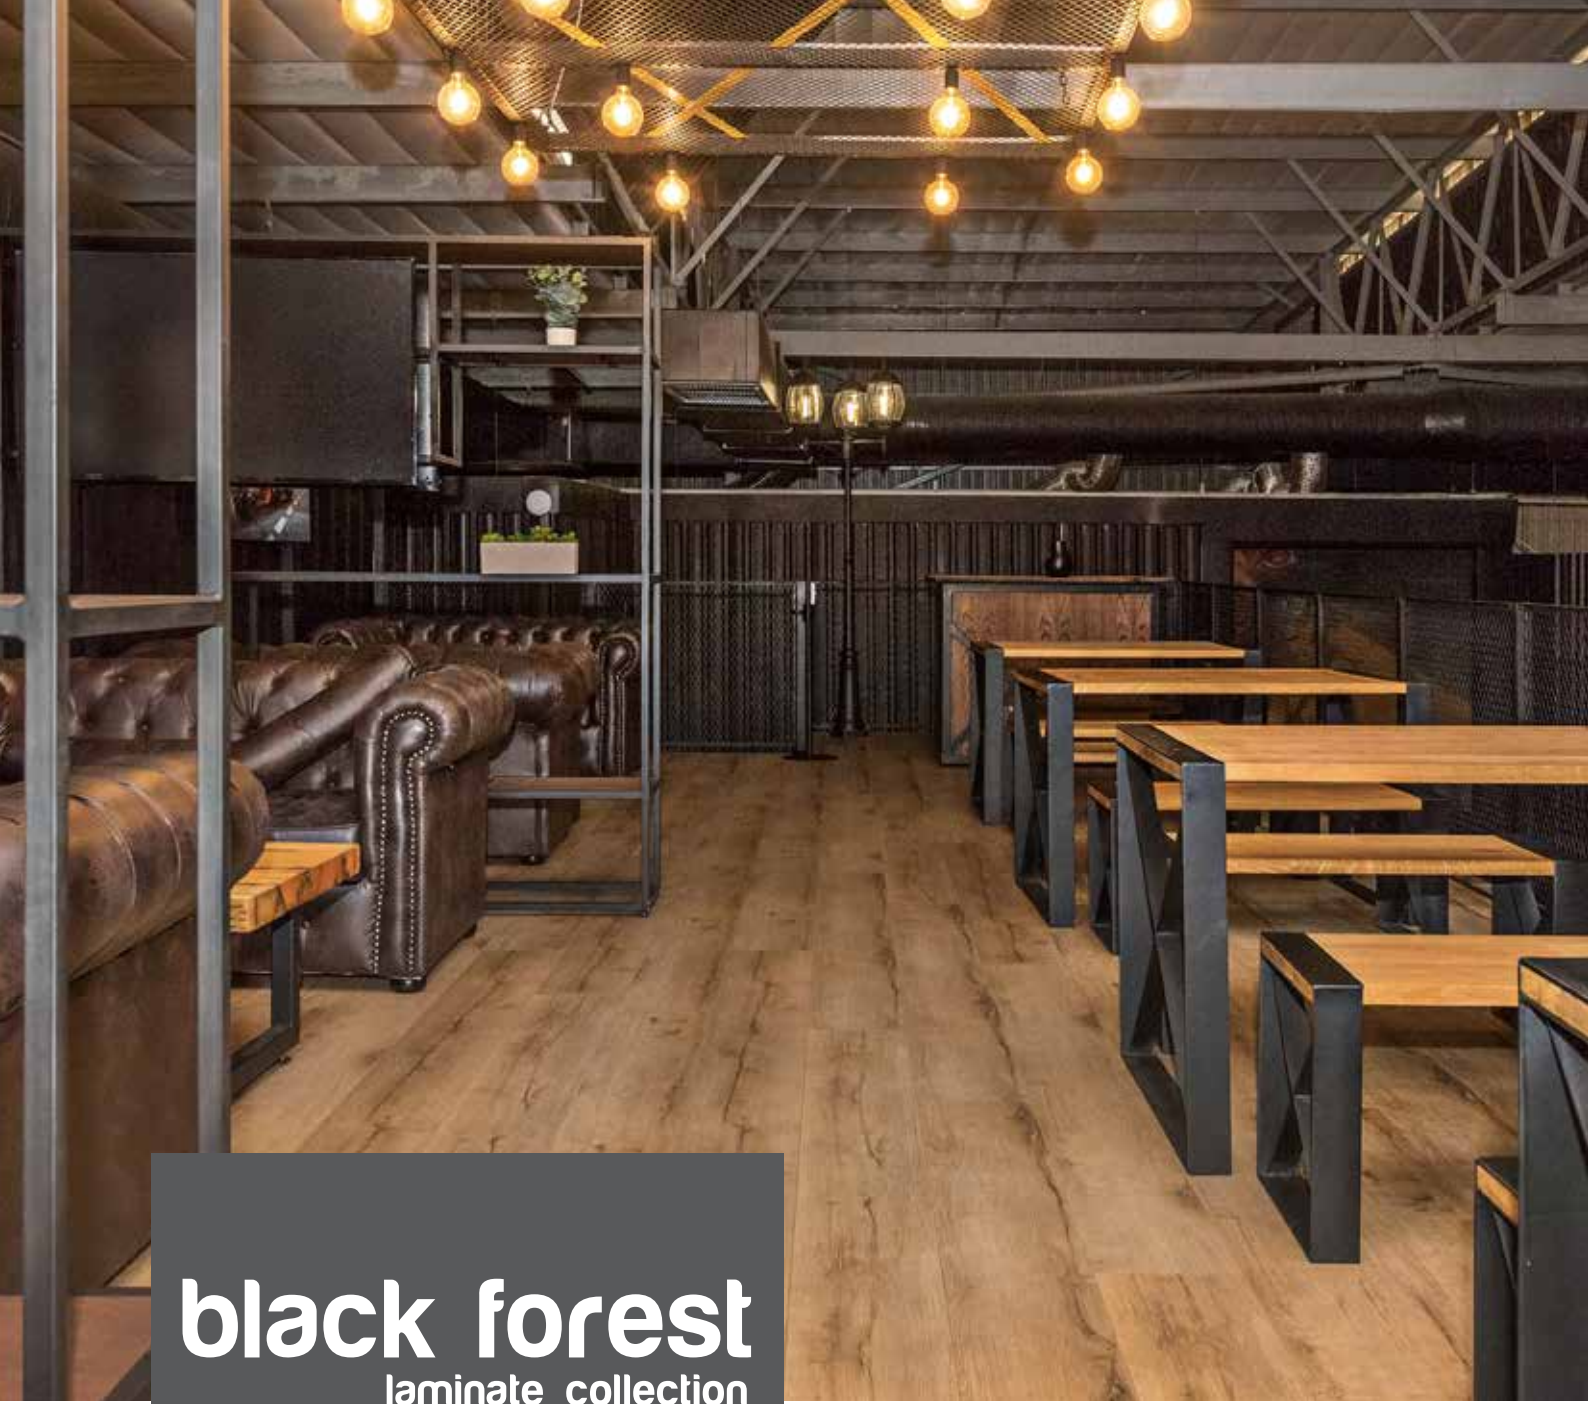
PAMIR - EIR - **V4**

 CMP - Smoked Topaz



TOROS - EIR - **V4**

 CMP - New york Grey



black forest laminate collection

OAKWOOD MANOR (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 12 x 239 x 2200mm
 Packaged: 3.15sqm - 6 pieces / box

Recommended Coverage: 16 X 18 lin.m in length / width before
 Core: Water-resistant Dare Global Core with average board density > 890/900 kg/m³
 Fit for use grading: AC4/W32 - V4 – General commercial / Heavy domestic
 Warranty: 25 years heavy domestic / 5 years moderate commercial use

Water resistant laminate

The dense Dare global HDF core is impregnated with a wax treatment making these planks more resistant to moisture with one of the lowest swell rates available in South Africa.

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 8%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



XXL 12mm BLACK FOREST



WHITE ELDER - EIR -

CMP - Santos Latte



MAPLEWOOD MIST - EIR -

CMP - Santos Latte



SUN BLEACHED OAK - MATT WOOD GRAIN -

CMP - Sand



OAKWOOD MANOR - EIR -

CMP - Oakwood Manor



NORDIC GREY - MATT WOOD GRAIN -

CMP - Meric



WOODLAND OAK - MATT WOOD GRAIN -

CMP - Dark Bronze



AUTHENTIC
herringbone
click laminate flooring

OAK (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 12 x 101 x 606mm
Packaged: 2.20sqm - 36 pieces / box, sold in A and B planks

Recommended Coverage: 10 x 12 lin.m in length / width
Core: 12mm HDF Core with an average board density > 880/890 kg/m³
Fit for use grading: AC4/W32 - V4 – General commercial / Heavy domestic
Warranty: 25 years heavy domestic / 5 years moderate commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling < 12%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



AUTHENTIC HERRINGBONE




BLACK - MATT WOOD GRAIN - V4

CMP - Wenge



WHITE - MATT WOOD GRAIN - V4

CMP - Volga

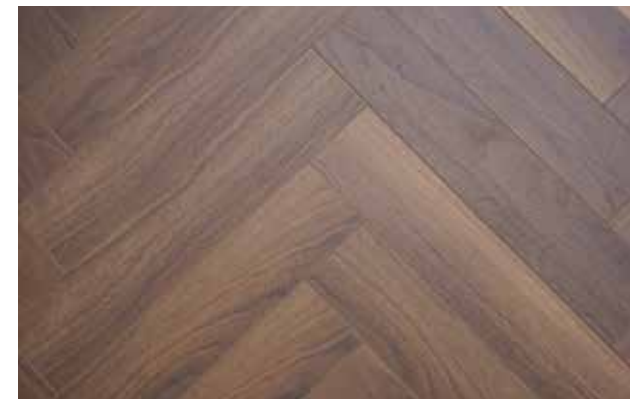

WALNUT - MATT WOOD GRAIN - V4

CMP - Walnut



SUN BLEACHED OAK - MATT WOOD GRAIN - V4

CMP - Sand



OAK - EIR - V4

CMP - Oakwood Manor




BLEACHED BEECH - MATT WOOD GRAIN - V4


CMP - Meric

AUTHENTIC HERRINGBONE LAYING PATTERNS

Herringbone laying patterns

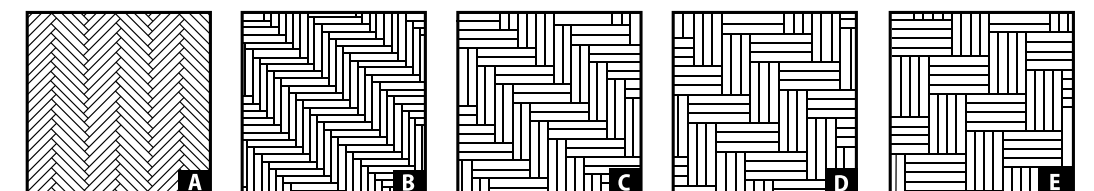

Basket weave laying patterns

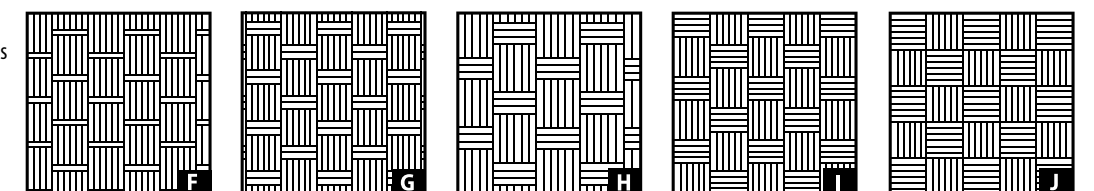



UMGENI (ABOVE)



PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 196 X 1216 x 8mm
 Packaged: 1.91sqm - 8 pieces / box
 Recommended Coverage: 10 x 12 lin.m in length / width
 Core: Water-resistant HFD. Core with an average board density > 880/890 kg/m³
 Fit for use grading: AC4/W32 - V4 – General commercial / Heavy domestic
 Warranty: 25 years heavy domestic / 5 years moderate commercial use

Water resistant laminate

With a wax impregnated core and waxed edges on the locking system, these Inovar floor planks are highly moisture resistant and have a very low swell rate.

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 8%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



INOVAR FLOOR



ATHENS OAK - EIR - V4 CMP - Volga LIMPOPO - EIR - V4 CMP - New York Grey



CALEDON - EIR - V4 CMP - Sand STORM - EIR - V4 CMP - Storm



JUKSKEI - EIR - V4 CMP - Sand OREGON PINE - EIR - V4 CMP - Teak



BUFFALO - EIR - V4 CMP - Yellow Gum UMGENI - EIR - V4 CMP - Oakwood Manor



supreme
laminate flooring

SIBERIAN (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 8 x 239 x 1216mm
Packaged: 2.325sqm - 8 pieces / box

Recommended Coverage: 9 x 9 lin.m in length / width
Core: 8mm HDF Core with an average board density > 850 kg/m³
Fit for use grading: AC3/W31 – Moderate commercial / Heavy domestic
Warranty: 10 years heavy domestic / 5 years moderate commercial use

ULTRA WIDE PLANK

V4 Trending Ultra wide 239mm plank with either wood grain texture or Low gloss cross cut and a 4 sided v-groove

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC3/W31 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling < 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC1



SUPREME



SIBERIAN - WOOD GRAIN - **V4**

CMP - Hungarian Ash



SANDALWOOD - WOOD GRAIN - **V4**

CMP - Harvard Cherry



ASPHALT - WOOD GRAIN - **V4**

CMP - Storm



HELENA OAK - WOOD GRAIN - **V4**

CMP - Merbau



GRANITE - WOOD GRAIN - **V4**

CMP - Santos Latte



AUTUMN OAK - LOW GLOSS CROSS CUT - **V4**

CMP - Harvard Cherry

UNDERLAYS AND ACCESSORIES



COMBILAY
2mm thick aerothene that is laminated onto a clear 80 micron virgin plastic moisture membrane, with a 100mm overlap on the one side that is to be taped down.

Made from virgin plastic


- Cushioning
- Moisture and mold resistant, Non-absorbent and rot resistant
- Protects flooring from moisture egress from screed
- Enhanced floorcovering lifespan
- Minimal Thermal Properties - energy saving




FINIXPE
A premium acoustic underlay made up of a 2mm sound dampening high performance Irradiated Cross-Linked Polyethylene (IXPE) extra fine foam, with an overlapping 80 micron HDPE (High Density Polyethylene) vapour barrier, for extra moisture protection at the joints. Easy to install with easy peel tape to adhered to the 100mm overlap

- Sound absorbing
- Moisture and mold resistant
- Enhanced floorcovering lifespan
- Increased Thermal Properties
- Increased acoustic properties
- Cushioning
- Non-absorbent and rot resistant
- Excellent Rebound properties
- Energy saving
- Anti-Static and Anti-Allergenic

SKIRTING AND QUADS




FINSkirting
80 x 16 x 2700mm
Cover expansion gaps along walls




FINQuad
28 x 12 x 2700mm
Cover expansion gaps along walls and cupboards.

MDF colour matching skirting and quads are for use with all FINFLOOR laminate, vinyl and engineered wooden flooring ranges.


MDF WRAPPED PROFILES




Adaption Profile
43 x 12 x 2700mm
For connection floor to adjacent lower surface



End Profile
35 x 12 x 2700mm
For borders of different floor surfaces and front of sills




Transition Profile
51 x 12 x 2700mm
For connection of floors of the same level




Stair nose Profile
66 x 16 x 2700mm
Used to cover the edge between riser and step

Save time and money with a wide selection of ready-finished and colour matched profiles. Affordable colour matching MDF profiles are for use with all our laminate ranges.


ALUMINIUM WRAPPED PROFILES




Adaption Profile
13 x 44 x 2900mm
For connection floor to adjacent lower surface



End Profile
10 x 27.7 x 2900mm
Borders of different floor surfaces and front of sills



Transition Profile
8.5 x 36.4 x 2900mm
For connection of floors of the same level



Stair nose Profile
20 x 34 x 2900mm
Cover the edge between riser and step

Aluminium profiles don't swell are available with adjustable heights. They can be use with vinyl, laminate or engineered wood flooring installations with planks ranging from 4-18mm in height. End profiles come in 2 different heights, for use with laminate or vinyl installations. Specify end height on order and if they are for vinyl or laminate floors.

JOHANNESBURG
Unit 2b, 11 Olympia Street
Sandton

DURBAN
14 Cassiafield Grove
Springfield Park
Durban

CAPE TOWN
9 Industria Road, Brakenfell
Cape Town